

Brillion[™]
Farm Equipment
A LANDOLL PRODUCT

SEEDBED MULCH TUCKER



- Tuck and Lock Mulch in Place Over New Seedings
- 6' & 8' Models Available
- Cat. I and II Three-Point Hitch Models
- Triple Sealed, Self-Aligning Bearings
- Controls Erosion Through Mulch Control

MADE
IN THE
USA

Brillion[™]
Farm Equipment


www.brillionfarmeq.com

SPECIFICATIONS

	SMT-6	SMT-8	T-6	T-8
Approximate Weight	1,340 lbs. (603 kg)	1,600 lbs. (720 kg)	404 lbs. (182 kg)	491 lbs. (221 kg)
Working Width	6 ft. 0 in. (1.8 m)	8 ft. 0 in. (2.4 m)	6 ft. 0 in. (1.8 m)	8 ft. 0 in. (2.4 m)
Transport Width	6 ft. 8 in. (2.0 m)	8 ft. 8 in. (2.6 m)	6 ft. 8 in. (2.0 m)	8 ft. 8 in. (2.6 m)
Transport Height	Dependent Upon Tractor	Dependent Upon Tractor	Dependent Upon Tractor	Dependent Upon Tractor
Road Clearance	Dependent Upon Tractor	Dependent Upon Tractor	Dependent Upon Tractor	Dependent Upon Tractor
Overall Length	3 ft. 10 in. (1.15 m)	3 ft. 10 in. (1.15 m)	2 ft. 0 in. (600 mm)	2 ft. 0 in. (600 mm)
Frame Structure	4 in. x 4 in. (254 mm x 254 mm)	4 in. x 4 in. (254 mm x 254 mm)	4 in. x 4 in. (254 mm x 254 mm)	4 in. x 4 in. (254 mm x 254 mm)
Pulverizer Wheels	16 in. (406 mm) Notched Gray Iron	16 in. (406 mm) Notched Gray Iron	NA	NA
Number of Wheels	18	24	NA	NA
Axle Size - Pulverizer	4 in. (100 mm)	4 in. (100 mm)	NA	NA
Pulverizer Bearings	Triple Sealed	Triple Sealed	NA	NA
Tucker Wheels	20 in. x .1875 in. (508 mm x 47 mm)	20 in. x .1875 in. (508 mm x 47 mm)	20 in. x .1875 in. (508 mm x 47 mm)	20 in. x .1875 in. (508 mm x 47 mm)
Number of Tucker Wheels	9	12	9	12
Axle Size - Tucker	1.5 in. (38.1 mm) Square	1.5 in. (38.1 mm) Square	1.5 in. (38.1 mm) Square	1.5 in. (38.1 mm) Square
Tucker Bearings	Triple Sealed Self-Aligning	Triple Sealed Self-Aligning	Triple Sealed Self-Aligning	Triple Sealed Self-Aligning
Three-Point Hitch	Cat. I Free Link	Cat. I, II, Free Link; Cat. I, II Quick Coupler Hitch	Cat. I Free Link	Cat. I, II, Free Link; Cat. I, II Quick Coupler Hitch
SMV Emblem	Standard	Standard	Standard	Standard
Horsepower Requirements	35 HP (26.88 kW) and up	45 HP (33.6 kW)	35 HP (26.88 kW) and up	45 HP (33.6 kW)
Recommended Operating Speed	3 to 6 MPH (5 to 10 km/h)	3 to 6 MPH (5 to 10 km/h)	3 to 6 MPH (5 to 10 km/h)	3 to 6 MPH (5 to 10 km/h)

Specifications subject to change without notice.

The three-point hitch is Cat. I Free Link on 6 foot models. The 8 foot models feature a Cat. I, II Free Link and Cat. I, II Quick Coupler Hitch with a floating top link to better accommodate uneven terrain. The hitch is also fully adjustable allowing the machine to operate in either direction.

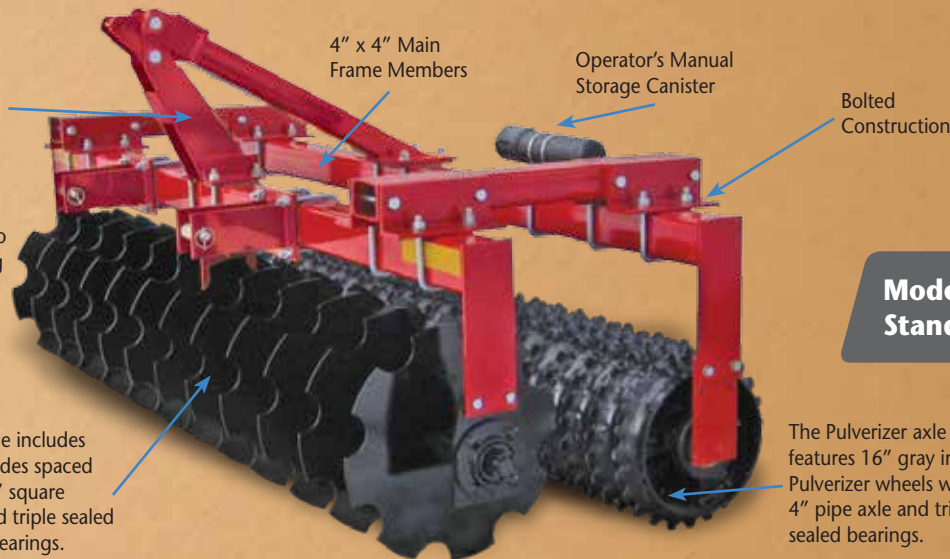

The Tucker axle includes 20" tucker blades spaced at 8", a 1 1/2" square arbor bolt, and triple sealed self-aligning bearings.

The Pulverizer axle features 16" gray iron Pulverizer wheels with a 4" pipe axle and triple sealed bearings.

Model SMT-8 Shown with Standard Equipment

The Brillion Seedbed Mulch Tucker fills a niche in the seeding operations of many specialty jobs around the country. Primarily used after the seeding operation is complete and the mulch is blown on, the Seedbed Mulch Tucker helps anchor the mulch into the seedbed while enhancing the seed to soil contact. This operation is often mandated by many federal, state and municipal seeding jobs.

The Seedbed Mulch Tucker is a very simple machine that features a front axle with 20" tucker blades that anchor the mulch to the seedbed. The rear axle uses 16" gray iron Pulverizer wheels to firm and finish the job. Triple sealed bearings support the axles on each end.

Brillion offers the Seedbed Mulch Tucker in 6 and 8 foot sizes. The T-6 and T-8 models include the tucker axle only; the Pulverizer axle can be added as a field installed option.



220 N. Francis Street
P.O. Box 8
Brillion, WI 54110
Phone: 920.524.2220
Toll Free: 855.320.0373
Fax: 888.761.8568



www.facebook.com/landollag

SMT_0113_Z_0117

