




Model 835AG Line Drawing

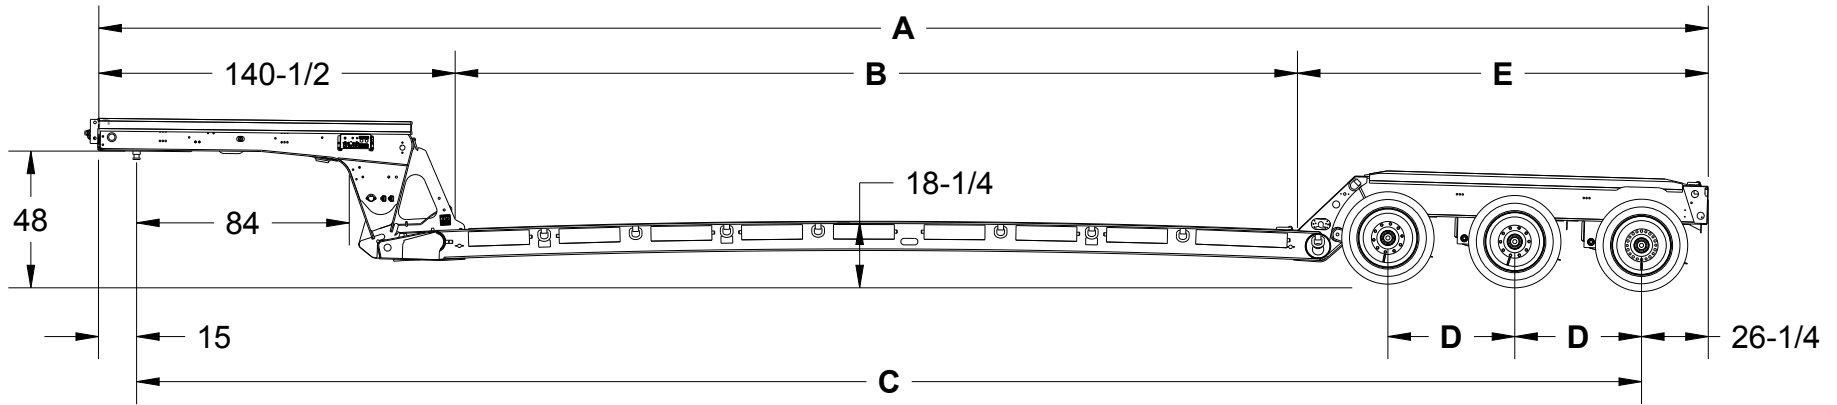

MODEL	A		B		C		D		E	
	FEET IN.	METERS	FEET IN.	METERS	FEET IN.	METERS	IN.	CM.	FEET IN.	METERS
835AG-R27-53	52' 10-1/2"	16.12	27' - 8"	8.43	49' 5-1/4"	15.07	50" / 50"	127.00	13' - 6"	4.11
835AG-R26-53	52' 10-1/2"	16.12	26' - 0"	7.92	49' 5-1/4"	15.07	60" / 60"	152.40	15' - 2"	4.62
835AG-S26-53	52' 10-1/2"	16.12	26' - 0"	7.92	49' 5-1/4"	15.07	120"	304.80	15' - 2"	4.62

2013 / 01 / 05
LD835AG-R27-53


Disclaimer - Landoll has a corporate policy of continuous product improvement and development, therefore, specifications are subject to change without any advance notice. Landoll is not responsible for differences between the specifications or illustrations contained on literature, data sheets, website and actual equipment.

This drawing and all information therein is property of Landoll and is confidential. It must not be made public or copied. This drawing is loaned subject to return upon demand and shall not be used directly or indirectly in anyway detrimental to our interest. Drawing illustrates standard equipment; optional equipment may change standard measurements.





Model 835 Line Drawing (With Optional 3rd Flip Axle)

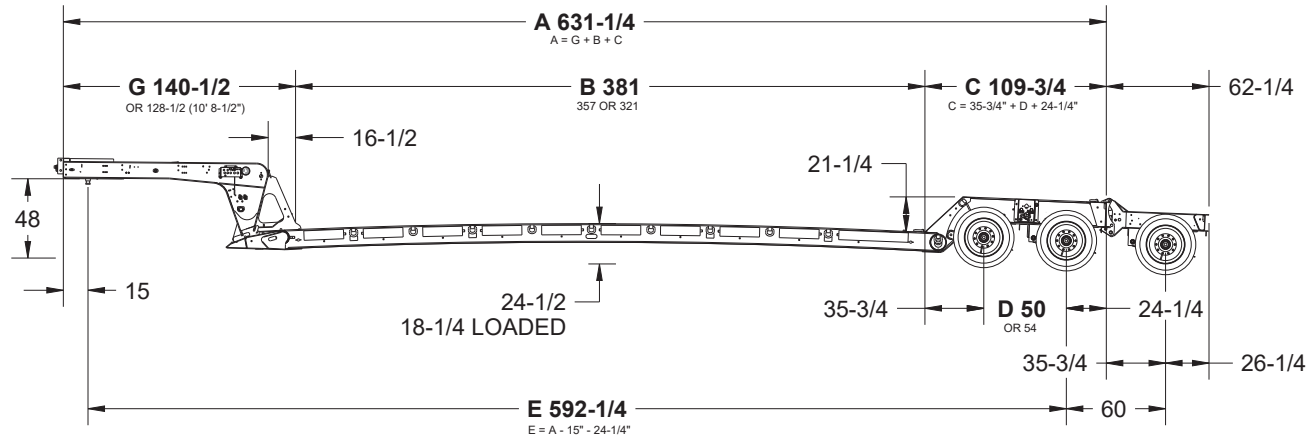

MODEL, # OF AXLES, AXLE SPREAD	A TOTAL LENGTH	G GOOSENECK (G/N)	B L/D BED LENGTH	C TRUNNION	D AXLE SPACING	E KING PIN TO REAR AXLE
835 AG 2AX 50SPD	631-1/4 (52' 7-1/4")	140-1/2 (11' 8-1/2")	381 (31' 9")	109-3/4	50	592-1/4 (49' 4-1/4")
835 AG 2AX 50SPD	607-1/4 (50' 7-1/4")	140-1/2 (11' 8-1/2")	357 (29' 9")	109-3/4	50	568 -1/4 (47' 4-1/4")
835 AG 2AX 50SPD	571-1/4 (47' 7-1/4")	140-1/2 (11' 8-1/2")	321 (26' 9")	109-3/4	50	532-1/4 (44' 4-1/4")
835 AG 2AX 54SPD	635-1/4 (52' 11-1/4")	140-1/2 (11' 8-1/2")	381 (31' 9")	113-3/4	54	596-1/4 (49' 8-1/4")
835 AG 2AX 54SPD	611-1/4 (50' 11-1/4")	140-1/2 (11' 8-1/2")	357 (29' 9")	113-3/4	54	572 -1/4 (47' 8-1/4")
835 AG 2AX 54SPD	575-1/4 (47' 11-1/4")	140-1/2 (11' 8-1/2")	321 (26' 9")	113-3/4	54	536-1/4 (44' 8-1/4")
835 AG 2AX 50SPD	619-1/4 (51' 7-1/4")	128-1/2 (10' 8-1/2")	381 (31' 9")	109-3/4	50	580-1/4 (48' 4-1/4")
835 AG 2AX 50SPD	595-1/4 (49' 7-1/4")	128-1/2 (10' 8-1/2")	357 (29' 9")	109-3/4	50	556 -1/4 (46' 4-1/4")
835 AG 2AX 50SPD	559-1/4 (46' 7-1/4")	128-1/2 (10' 8-1/2")	321 (26' 9")	109-3/4	50	520-1/4 (43' 4-1/4")
835 AG 2AX 54SPD	623-1/4 (51' 11-1/4")	128-1/2 (10' 8-1/2")	381 (31' 9")	113-3/4	54	584-1/4 (48' 8-1/4")
835 AG 2AX 54SPD	599-1/4 (49' 11-1/4")	128-1/2 (10' 8-1/2")	357 (29' 9")	113-3/4	54	560 -1/4 (46' 8-1/4")
835 AG 2AX 54SPD	563-1/4 (46' 11-1/4")	128-1/2 (10' 8-1/2")	321 (26' 9")	113-3/4	54	524-1/4 (43' 8-1/4")

SHOWN
AX = AXLE
SPD = SPREAD

2022 / 02 / 03
PAGE 1
LD835-AG

Disclaimer - Landoll has a corporate policy of continuous product improvement and development, therefore, specifications are subject to change without any advance notice. Landoll is not responsible for differences between the specifications or illustrations contained on literature, data sheets, website and actual equipment.

The information on any form of this website is intended only for the sole use of Landoll. We do not share or sell any of this information to third parties. This drawing and all information therein is property of Landoll and is confidential. It must not be made public or copied. This drawing is loaned subject to return upon demand and shall not be used directly or indirectly in anyway detrimental to our interest. Drawing illustrates standard equipment; optional equipment may change standard measurements.

Landoll • Marysville, KS USA • 800-428-5655 • www.landoll.com

