



317 / 318

TRAVELING AXLE TRAILER



- 62,000 lb Dock Level Hydraulics Option
- Load from Ground to 57" Dock Height




- 6 Tiedowns
- Chain Slots




- Centralized Grease System



- Easy to Operate Hydraulic Controls
- Selector Valve for Dock Legs

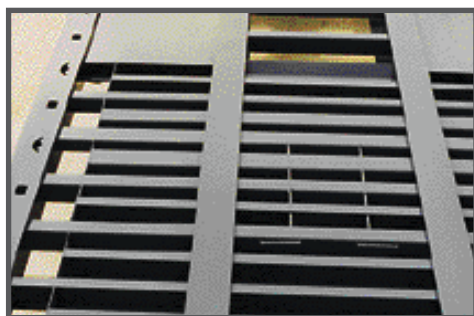

- Fabricated Four I-Beam Frame
- Jr. I-Beam on 8" Centers
- Heavy Duty Steel Plate Over Wheels

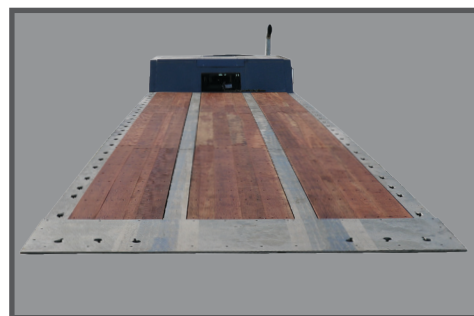

- 29" Full Width Flat Approach Plate, No Hinge
- Equipped with 6 Tie Down Slots
- Load a Wide Variety of Equipment
- Hot-Dipped Galvanizing Option

PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!

1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES

Model 317 / 318 Traveling Axle Trailer

S=Standard O=Optional

MODEL 318	50 TON	100,000 lb		
MODEL 317	35 TON	70,000 lb		
MAIN FRAME				
- Fabricated 100,000 PSI and 80,000 PSI Yield Steel			S	S
- Four Beam Frame Design			S	S
KINGPIN SETTING				
- 24" Setting / 70½" Swing Clearance			S	
- 18" Setting / 76½" Swing Clearance			O	
- 26" Setting / 74½" Swing Clearance				S
CROSSMEMBERS				
- Alternating 4" and 3" Jr. I-Beams on 8" Centers			S	
- 4" Jr. I-Beam on 8" Centers				S
DECK AND FEATURES				
- 48', 50', 53' Overall Length			O	O
- 102" Width			S	S
- 38" Deck Height (Loaded)			S	S
- 1¾" Apitong Wood Deck			S	S
- 45° Slope Drop			S	S
- 90° Slope Drop			O	O
- 24" Pull-Out Side Extension or 12" Outrigger Swing Out			O	O
- Load Angle 8.5°			S	S
- Capacity - 70,000 lb Distributed 50,000 lb Concentrated in 10'			S	
- Capacity - 100,000 lb Distributed 70,000 lb Concentrated in 10'				S
- Landoll Hoses and Components Certified to -40°F			S	S
WINCHES AND ACCESSORIES				
- 12,000 lb Worm Gear with Spring Tension and 85' of ½" Cable			S	S
- 20,000 lb Worm Gear with Spring Tension and 85' of ⅝" Cable			O	O
- 30,000 lb Planetary 2-Speed with 85' of ⅝" Flex 9 Cable			O	O
TOOL BOX				
- Twin Side Mounted in Upper Deck with Lockable Doors			S	S
7" H x 34" W x 29" D, Inside with 6½" H x 11½" W x 29" D Opening				
TIE DOWNS / CHAIN GOTCHAS				
- Double Key Hole Chain Slots with Stake Pockets on 16" Centers			S	S
PARKING STANDS				
- Jost Two Speed Landing Gear			S	S
- Hydraulic Parking Stands			O	O
- Pin Drop			O	O
SUSPENSION / AXLES				
- SAF-Holland / Neway RLU228 Air Ride, 22,500 lb Capacity			S	S
- Dock Level Hydraulics - 62,000 lb			O	O
(Not Available with 215/75R 17.5 Lo-Pro Tires)				
- Dock Level Hydraulics - 124,000 lb				O
(Not Available with 215/75R 17.5 Lo-Pro Tires)				
- Centralized Grease System			S	S
- (2) 25,000 lb Dual Tire, Oil Bath Bearings			S	
- (3) 25,000 lb Dual Tire, Oil Bath Bearings				S
BRAKES				
- 12.25x7.5 Full Air / Spring Brakes ABS, 4S2M			S	S
- 16.5x7 Full Air / Spring Brakes ABS, 4S2M			S	S
TIRES / RIMS				
- 235/75R 17.5 Double Coin Tires on 17.5x6.75 Tubeless Rims			S	S
- 255/70R 22.5 Double Coin Tires on 22.5x7.5 Tubeless Rims			O	O
- Tire Inflation System			O	O
- Hubometer			O	O
APPROACH PLATE				
- Flat Approach Plate with 6 Key Hole Tie Downs			S	S
HYDRAULIC HOOK UP				
- Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max			S	S
WIRING HARNESS / LIGHTS				
- Grote Rubber Grommet Mounted Annealed LED Lighting			S	S
- Grote "Xtreme" Wiring Harness (7-Year Warranty)			S	S
- Center Mounted Side Turn Signal			S	S
FINISH / COLOR				
- Steel Grit Shot Blast to Bright Metal			S	S
- Zinc Rich Primer			S	S
- TGIC Polyester Powder Coat			S	S
White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray				
- Galvanizing			O	O
WEIGHT				
- 48' - 17,000 lb (approximate base)			S	
- 48' - 20,000 lb (approximate base)				S

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



Field Installed Options

- Self Contained Hydraulic Power
- Dock Level Hydraulics
- Remote Controls
- Bulkheads



1900 North Street

317/318 - 0525

CALL 1-800-428-5655
REMEMBER: QUALITY IS ALWAYS A BARGAIN!

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE