




318

TOTER HITCH CONTAINER TRAILER

The 53' 318 container trailer has a 29" 90° drop, 10' 6" upper deck, and 18" king pin setting providing an 80" swing for "TOTER" hitch swing clearances.




- Easy to Operate, Well-Lit Control Panel
- Air-Weigh Digital Scale
- Clearly Labeled Container Locations

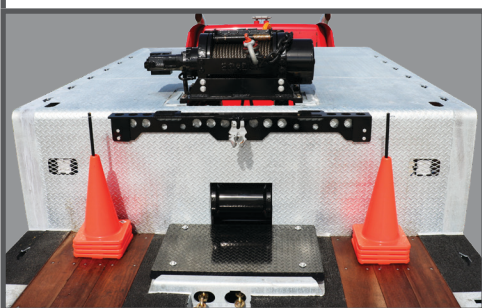


- Easy Access to Traffic Safety Cones
- Heavy-Duty Push Bar with Storage by the 90° Drop



- Engineered Chain Hooks for Pulling the Container Completely onto the Trailer

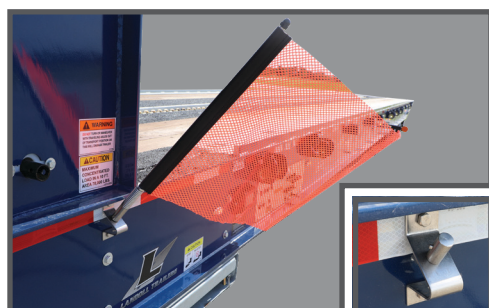

- Spring Mounted Warning Flags with Holders at the Front, Drop and Rear Area

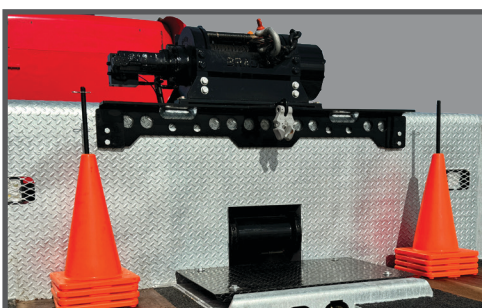

- 30,000 lb Planetary Drive Winch at Rear Upper Deck with Slope Roller in the Gooseneck Drop Area
- 12,000 lb Capacity Gearbox at the Front of the Lower Deck



- Traction Paint Walkway on Both Sides of the Chain Drive
- 42' 6" Lower Deck with 5/16" x 6" Skid Plate
- 1" x 1 1/2" Tall Toe Board
- Hot-Dipped Galvanizing Option

PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!

1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES

Model 318 Toter Hitch Container Trailer

S=Standard O=Optional

MODEL 318	50 TON	100,000 lb
MAIN FRAME		
- Fabricated 100,000 PSI and 80,000 PSI Yield Steel	S	
- Four Beam Frame Design	S	
KINGPIN SETTING		
- 18" Setting / 80" Swing Clearance	S	
CROSSMEMBERS		
- 4" Jr. I-Beam on 8" Centers	S	
DECK AND FEATURES		
- 53' Overall Length	S	
- 102" Width	S	
- 38" Deck Height (Loaded)	S	
- 1" Apitong Wood Deck	S	
- 90° Slope Drop	S	
- Load Angle 8.5°	S	
- Capacity - 100,000 lb Distributed 70,000 lb in 10'	S	
- Landoll Hoses and Components Certified to -40°F	S	
WINCHES (Supplied with 85' of 5/8" Flex 9 Cable)		
- 30,000 lb Planetary Drive 2-Speed with Air Tension and Kick-Out	S	
- 20,000 lb Planetary Drive 2-Speed with Air Tension and Kick-Out	O	
- Chain Drive 12,000 lb Gearbox	O	
TOOL BOX		
- Twin Side Mounted in Upper Deck with Lockable Doors	S	
TIE DOWNS / CHAIN GOTCHAS		
- Double Key Hole Chain Slots with Stake Pockets on 16" Centers	S	
PARKING STANDS		
- Jost Two Speed Landing Gear	S	
- Hydraulic Parking Stands	O	
- Pin Drop	O	

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.


MODEL 318	50 TON	100,000 lb
SUSPENSION / AXLES		
- SAF-Holland / Neway RLU228 Air Ride, 22,500 lb Capacity	S	
- Dock Level Hydraulics - 62,000 lb	O	
(Not Available with 215/75R 17.5 Lo-Pro Tires)		
- Centralized Grease System	S	
- (3) 25,000 lb Dual Tire, Oil Bath Bearings	S	
BRAKES		
- 12.25x7.5 Full Air / Spring Brakes ABS, 4S2M	S	
- Dexter Air Disc Brakes	O	
- 16.5x7 Full Air / Spring Brakes ABS, 4S2M	O	
TIRES / RIMS		
- 235/75R 17.5 Double Coin Tires on 17.5x6.75 Tubeless Rims	S	
- 255/70R 22.5 Double Coin Tires on 22.5x7.5 Tubeless Rims	O	
- 255/70R 22.5 Michelin Tires on 22.5x7.5 Tubeless Rims	O	
- Tire Inflation System	O	
- Hubometer	O	
APPROACH PLATE		
- Flat Approach Plate with (4) Two-Way Key Hole Tie Downs	S	
HYDRAULIC HOOK UP		
- Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max	S	
WIRING HARNESS / LIGHTS		
- Grote Rubber Grommet Mounted Annealed LED Lighting	S	
- Grote "Xtreme" Wiring Harness (7-Year Warranty)	S	
- Center Mounted Side Turn Signal	S	
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal	S	
- Zinc Rich Primer	S	
- TGIC Polyester Powder Coat	S	
White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray		
- Hot Dipped Galvanized Frame, Undercarriage, and Bumper	O	
WEIGHT		
- 53' - 24,000 lb (approximate base)	S	



- Galvanneal Pullout Step / Drawer Combo at the Drop



- Low Profile Strap Ratchets and Strap Pockets on Street Side
- Strap Pockets on Curb Side
- Angled D-Rings with Doubler Plate for Securing the Blast Box

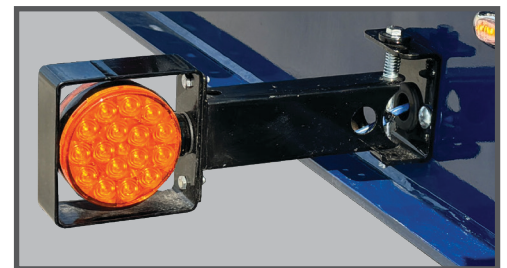

- Swingout Turn / Emergency Flashing Light on Lower Deck Outer Beams



1900 North Street

318-53 - 0525

CALL 1-800-428-5655
REMEMBER: QUALITY IS ALWAYS A BARGAIN!

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE