



MATERIAL HANDLING PRODUCTS



Optional Jib Boom and
Auxiliary Counterweight



PT-40

Forklift Attachment



PRECISION TELEHANDLER

PT40


STANDARD FEATURES

- Industrial Telehandler with 40,000 lb (18,182 kg) Capacity at 24" (610 mm) Load Center
- Compact Lowered Height, Can Lift 20 Tons (18,182 kg) 20 Feet (6.1 M)
- 88" (2.24 M) Tall, 6' (1.82 M) Wide, 8' (2.43 M) Reach, 20' (6.1 M) Lift, 27' (8.23 M) to Jib Eye and 6 Tons (5,454 kg) of Removable Counterweight
- Operational Modes – Unlocked (Ungated) & SYNC
- All Boom Movements, Including **TRUE VERTICAL LIFT** and **TRUE HORIZONTAL REACH** are Controlled by a Single Joystick
- Fork Tilt is Auto-Leveling with a Manual Override
- Fine-Feathering Hydraulics Ensure Smooth and Precise Load Positioning
- Smooth Hydrostatic Drive is Controlled by a Comfortable Foot Treadle
- The Deep Reduction Planetary Wheel Hubs Generate 20,000 lb (9,090 kg) of Tractive Effort and Can Propel a 20 Ton (18,182 kg) Load Up a 24% Grade
- Radio Remote Control Allows Many Jobs to be Completed with Only One Operator




WIRELESS REMOTE CONTROL

All PT40 drive and lift functions can be controlled via wireless transmitter, allowing a single operator to observe the entire work environment without being confined to the operator's station.

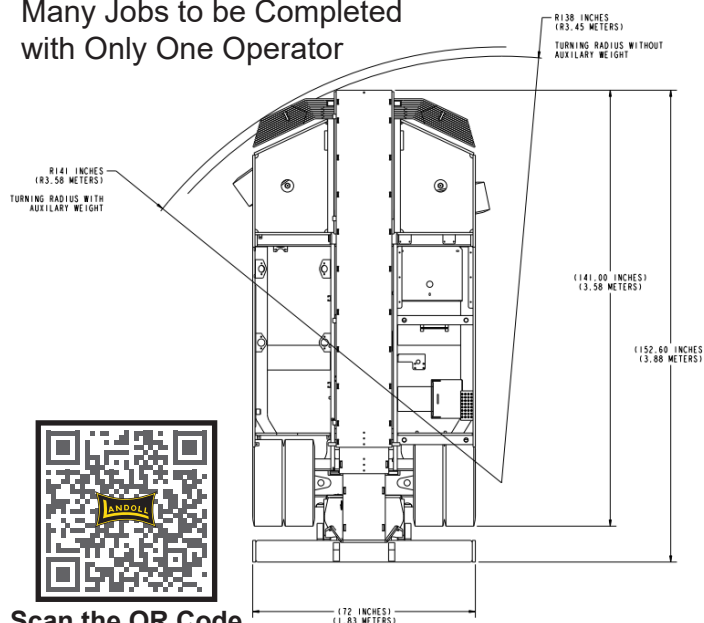

Scan the QR Code to Learn More!



PT40

Precision Telehandler

40,000 lb (18,182 kg) Capacity at 24" (610 mm) Load Center

TECHNICAL & DIMENSION DATA


| MODEL | PT40 |
|------------------------|--|
| Engine | 3.8L Kubota LPG at 2,600 RPM |
| Transmission | Hydrostatic, 0-6 MPH (0-9.67 KPH) Infinitely Variable |
| Hyd. System | Load Sensing, Pressure Compensated |
| Hyd. Filtration | 3 Micron Synthetic Element |
| Electrical | Sealed IP66 Minimum |

| MODEL | PT40 |
|---------------------------------------|---|
| Tires | 28" x 10" x 22" (711 mm x 254 mm x 559 mm), Front Duals, Rear Singles |
| Gradeability | 24% with 40,000 lb (18,182 kg) Load |
| Tractive Effort | 20,000 lb (9,090 kg) |
| Weights | 40,700 lb (18,500 kg) Complete |
| - Jib and Rack | 2,800 lb (1,273 kg) |
| - Removable Counterweight | 12,000 lb (5,454 kg) |
| - Bare Truck Weight | 24,400 lb (11,068 kg) |
| - Forks (2 Forks, 8' (2.4 M) Long) | 1,600 lb (727 kg) |
| - Jib | 2,650 lb (1,202 kg) |
| - 3 Standard Rear CTWT's | 12,000 lb (5,454 kg) |
| - Hang-On Aux CTWT | 4,300 lb (1,950 kg) |
| - Jib / Forks Rack | 680 lb (308 kg) |
| - Hang-On Aux Weight Rack | 470 lb (213 kg) |

The specifications contained in this spec sheet are subject to change at any time without notice. Actual dimensions and performance data given herein may vary due to manufacturing tolerances.

OPTIONAL FEATURES

- Jib Boom
- Remote Control
- Aux Weight for 48,000 lb (21,772 kg) Capacity at 24" (610 mm) Load Center
- Special Paint – Available Upon Request
- Added Weight Option – 8,000 lb

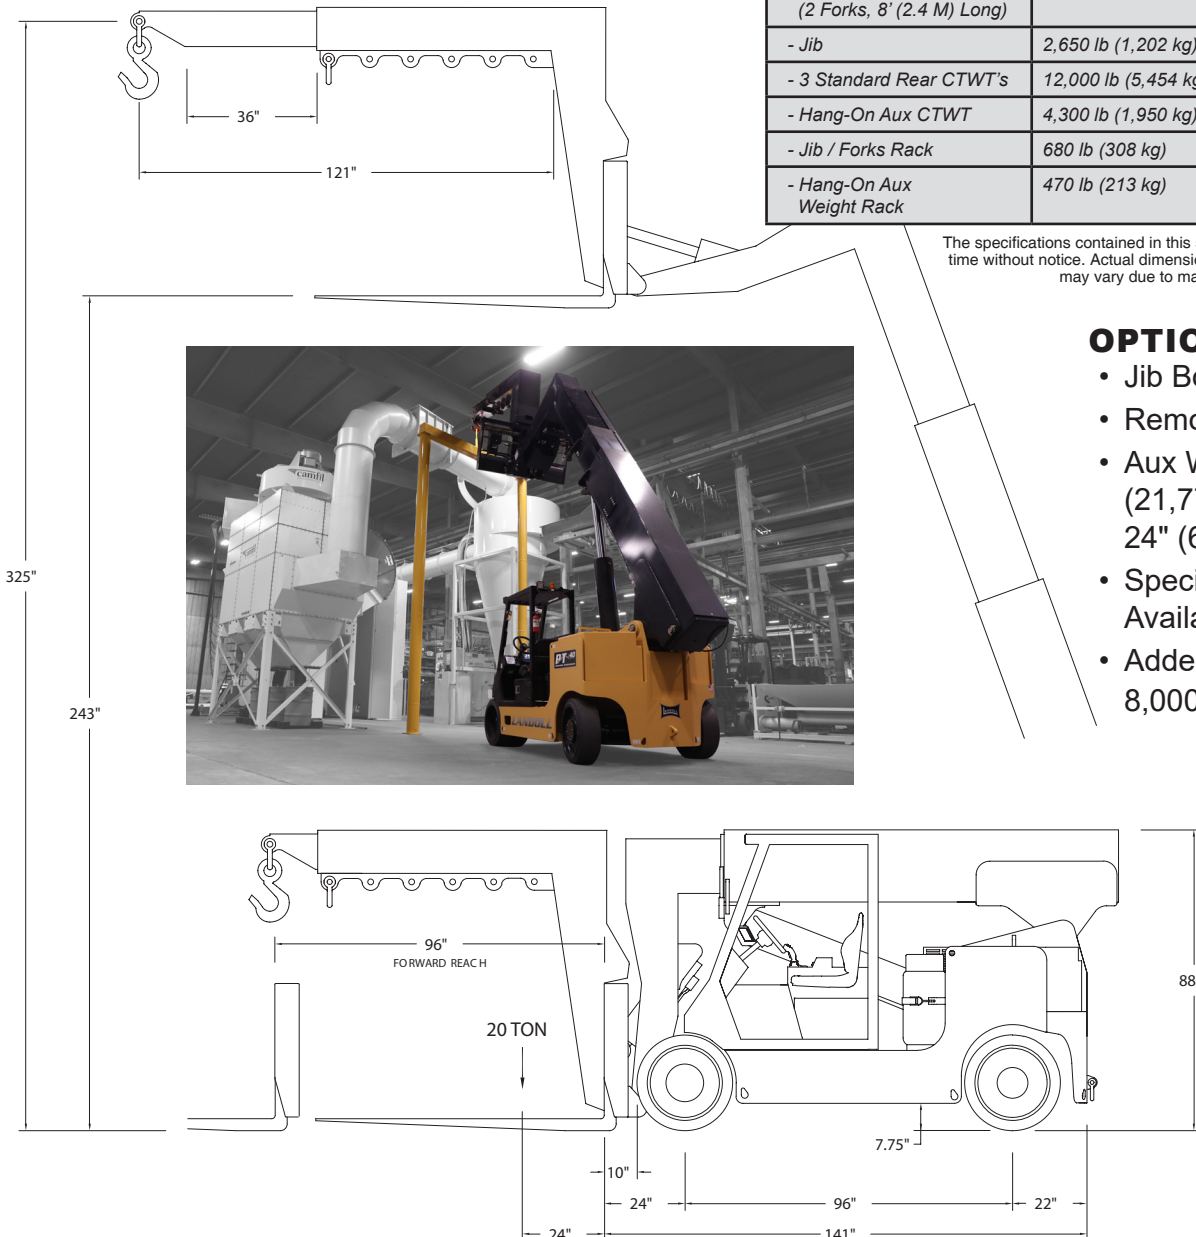

QUALITY IS OUR FIRST PRIORITY



**One Million Square Feet
of Production Facilities**

Proven Solutions for Storage & Specialty Handling Applications

Family owned and operated since 1963, we make quality our first priority. Our goal is to provide the best solution for your material handling needs. Bendi articulating, Drexel SwingMast® Narrow Aisle and Very Narrow Aisle forklifts provide that solution. Through increased utilization of space, improved productivity, greater flexibility and maximized efficiency. We stay on the edge of modern and innovative technology. We know that for our customers "Quality is Always a Bargain".



MATERIAL HANDLING PRODUCTS
landoll.com/mhp

1900 North Street Marysville, KS 66508 • 800-428-5655 • forkliftsales@landoll.com



Landoll continuously improves products. We reserve the right to make any changes in illustrations, specifications, equipment, and prices without prior notice and without changes on previous models.

PT40-0925