





# 330 CONTAINER TRAILER




- Left Side Toolbox 42" W x 28" D x 9" H
- Jost 2-Speed Crank Down Landing Gear

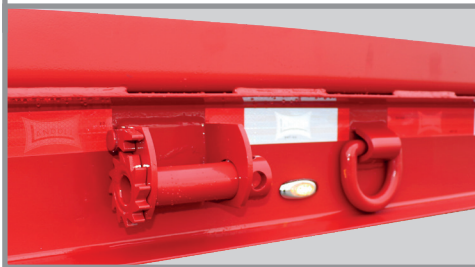

- 4 D-Rings, 4 Ratchets with Strap Hooks

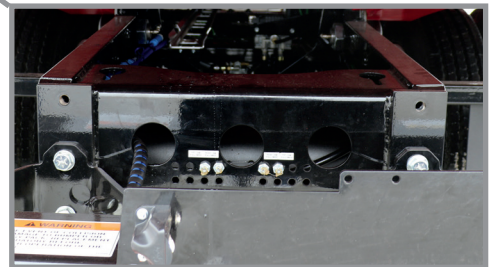


- Centralized Grease System

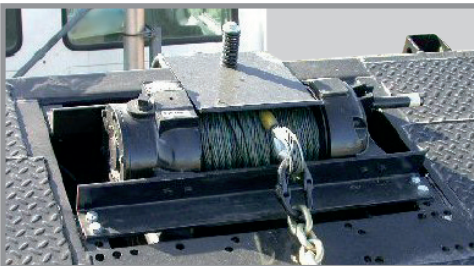

- 12,000 lb Worm Gear Winch
- Cable Roller Guide for Winch Option



- Easy to Operate Hydraulic Controls
- Self-Contained Engine Hydraulics Option

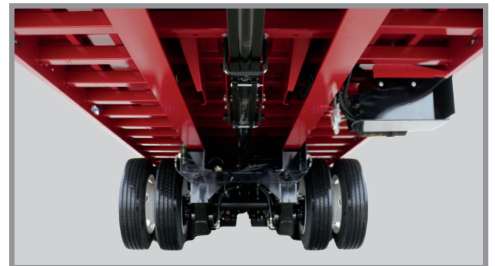

- Heavy-Duty Frame and Undercarriage Built for Years of Rugged Service
- Strong Enough to Haul Rental Equipment or Automotive Vehicles
- Hot-Dipped Galvanizing Option

**PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!**

**1-800-428-5655 | [www.landoll.com/trailers](http://www.landoll.com/trailers)**



# STANDARD & OPTIONAL EQUIPMENT / FEATURES

## Model 330 Container Trailer

S=Standard O=Optional

| MODEL 330-2                                                                                                    | 25 TON | 50,000 lb |
|----------------------------------------------------------------------------------------------------------------|--------|-----------|
| MODEL 330-1                                                                                                    | 8 TON  | 16,000 lb |
| <b>MAIN FRAME</b>                                                                                              |        |           |
| - Fabricated 80,000 PSI Yield Beams                                                                            | S      | S         |
| - Capacity - 16,000 lb Distributed 10,000 lb Concentrated in 10'                                               | S      | S         |
| - Capacity - 50,000 lb Distributed 20,000 lb Concentrated in 10'                                               | S      | S         |
| <b>KINGPIN SETTING</b>                                                                                         |        |           |
| - 30" Setting / 72" Swing Clearance                                                                            | S      | S         |
| - 18" Setting on 90° Drop / 72" Swing Clearance                                                                | S      | S         |
| - 24" Setting / 77½" Swing Clearance                                                                           | O      | O         |
| <b>CROSSMEMBERS</b>                                                                                            |        |           |
| - 3½" x 3½" Tube on 18" Centers                                                                                | S      | S         |
| <b>DECK AND ACCESSORIES</b>                                                                                    |        |           |
| - 42', 48' or 50' Overall Length                                                                               | S      | S         |
| - 102" Width                                                                                                   | S      | S         |
| - 42" Deck Height (Loaded) (Spring Ride) (Single Axle) (At Rear Axle)                                          | S      | S         |
| - 47" Deck Height (Loaded) (Air Ride) (Tandem Axle) (At Rear Axle)                                             | S      | S         |
| - 1/8" Steel Tread Plate, 5" Cable Trough - Full Length                                                        | S      | S         |
| - Formed Angle Skid Plate / Side 5/16" x 12" x 3½"                                                             | S      | S         |
| - 12° Load Angle                                                                                               | S      | S         |
| - 90° Drop in Lieu of Straight                                                                                 | O      | O         |
| - Under Deck Tool Box (42" x 28" x 9")                                                                         | S      | S         |
| - 29" Approach Plate with (4) Keyhole Tie Downs                                                                | S      | S         |
| - 1 Pair Adjustable Container Stops on Straight Trailer                                                        | S      | S         |
| - Light for Hydraulic Controls                                                                                 | S      | S         |
| - Centering Boards (2 Rear)                                                                                    | S      | S         |
| - Landoll Hoses and Components Certified to -40°F                                                              | S      | S         |
| <b>WINCHES AND ACCESSORIES</b>                                                                                 |        |           |
| - Worm Gear 12,000 lb with 85' of ½" Cable                                                                     | S      | S         |
| - Worm Gear 20,000 lb with 85' of 5/8" Cable                                                                   | O      | O         |
| - Wireless Remote Control                                                                                      | O      | O         |
| - Cable Roller Guide for Winch                                                                                 | O      | O         |
| - Slope Roller (Recommended for 90° Drop)                                                                      | O      | O         |
| <b>TIE DOWNS / CHAIN GOTCHAS</b>                                                                               |        |           |
| - (4) D-Rings - 2 Per Side, (4) 4" Strap Ratchets Curbside with Opposing Strap Hooks Street Side (Less Straps) | S      | S         |
| - Extra Flush Mounted D-Rings                                                                                  | O      | O         |
| - Extra Ratchet Winch for 4" Nylon Strap - Weld On (Less Straps)                                               | O      | O         |
| <b>BULKHEADS</b>                                                                                               |        |           |
| - 48" High Mesh, 102" Width                                                                                    | O      | O         |
| - Bolt-On Binder Storage Rack for 48" Bulkheads                                                                | O      | O         |
| - LED Work Light - Dual (Mounted on Bulkhead)                                                                  | O      | O         |
| - Spare Tire Carrier 48" Bulkhead Front Mount                                                                  | O      | O         |
| - Spare Tire Carrier 48" Bulkhead Rear Mount                                                                   | O      | O         |
| - Dual Spare Tire Carrier 48" Bulkhead Front Mount                                                             | O      | O         |

| MODEL 330-2                                                                                               | 25 TON | 50,000 lb |
|-----------------------------------------------------------------------------------------------------------|--------|-----------|
| MODEL 330-1                                                                                               | 8 TON  | 16,000 lb |
| <b>PARKING STANDS</b>                                                                                     |        |           |
| - Pin Drop                                                                                                | O      | O         |
| - Two Speed Crank Down Landing Gear                                                                       | S      | S         |
| <b>AXLES</b>                                                                                              |        |           |
| - (1) 25,000 lb Dual Tires, Oil Bath Bearings                                                             | S      | S         |
| - (2) 25,000 lb Dual Tires, Oil Bath Bearings                                                             | S      | S         |
| <b>SUSPENSION</b>                                                                                         |        |           |
| - Transpro Mono Leaf 25,000 lb Capacity per Axle                                                          | S      | S         |
| - Air Ride in Lieu of Spring                                                                              | O      | O         |
| - Low Load Angle 9½° (48' Only)                                                                           | O      | O         |
| <b>BRAKES</b>                                                                                             |        |           |
| - 16.5x7 Full Air / Spring Brakes, ABS 2S1M                                                               | S      | S         |
| - 16.5x7 Full Air / Spring Brakes, ABS 4S2M                                                               | S      | S         |
| - Steel Out Board Brake Drums                                                                             | S      | S         |
| <b>OIL SEAL HUBS / RIMS</b>                                                                               |        |           |
| - Internal Mated Assembly                                                                                 | S      | S         |
| - 22.5x8.25 Tubeless 10-Hole Hub Pilot Disc Type                                                          | S      | S         |
| <b>TIRES</b>                                                                                              |        |           |
| - 255/70R 22.5 Double Coin                                                                                | S      | S         |
| - 255/70R 22.5 Michelin in Lieu of Standard Spare Tires and Rims Available in Standard and Optional Sizes | O      | O         |
| <b>WHEEL ACCESSORIES</b>                                                                                  |        |           |
| - Hubodometer                                                                                             | O      | O         |
| <b>HYDRAULIC POWER SOURCE</b>                                                                             |        |           |
| - Quick Couplers / 2,500 PSI - 20 GPM at Controls, 50 GPM Max                                             | S      | S         |
| - Air Shift PTO and Wet Kit for Tractor - Not Installed                                                   | O      | O         |
| - 25 HP Engine Package (Upper Deck Mounted with Cover)                                                    | O      | O         |
| <b>AIR / ELECTRICAL CONNECTION</b>                                                                        |        |           |
| - Glad Hand / 7-Way Receptacle                                                                            | S      | S         |
| <b>LIGHTS</b>                                                                                             |        |           |
| - Grote Rubber Grommet Mounted Annealed LED Lighting                                                      | S      | S         |
| - Grote "Xtreme" Wiring Harness (7-Year Warranty)                                                         | S      | S         |
| - Center Mounted Side Turn Signal                                                                         | S      | S         |
| <b>FINISH / COLOR</b>                                                                                     |        |           |
| - Steel Grit Shot Blast to Bright Metal                                                                   | S      | S         |
| - TGIC Polyester Powder Coat                                                                              | S      | S         |
| - White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray                                    | S      | S         |
| - Galvanizing                                                                                             | O      | O         |
| <b>WEIGHT</b>                                                                                             |        |           |
| - 42' - 12,200 lb (+/-3%)                                                                                 | S      | S         |
| - 48' - 15,000 lb (+/-3%)                                                                                 | S      | S         |
| - 50' - Consult Factory                                                                                   | -      | -         |

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



1900 North Street

**CALL 1-800-428-5655**  
**REMEMBER: QUALITY IS ALWAYS A BARGAIN!**

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE