




345

PINTLE HITCH TRAILER

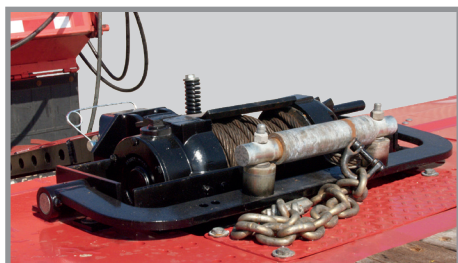


- 12,000 lb or 20,000 lb Winch Option



- Curb and Street Side Mounted Toolbox



- 9° Low Load Angle
- Hot-Dipped Galvanizing Option

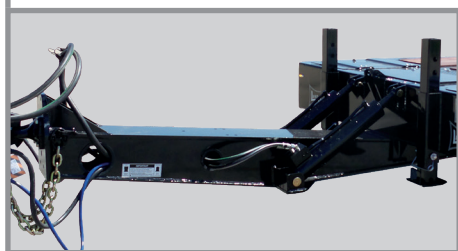

- Pintle Hitch



- Easy to Operate, Well-Lit Control Panel



- Keyhole Tie Downs on Approach Plate

PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!

1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES

Model 345 Pintle Hitch Trailer

S=Standard O=Optional

MODEL 345	25 TON	50,000 lb
MAIN FRAME		
- Fabricated 80,000 PSI Yield Four Beam Design		S
HITCH		
- Pintle Hook with 15,000 lb Vertical Load Eye with Adjustment of 23" to 32"		S
- 4' Hitch for Tractor without Bed Overhang		S
- 5' Hitch for Tractor with 1' Bed Overhang		O
- 7' Hitch for Tractor with 3' Bed Overhang		O
CROSSMEMBERS		
- 3" and 4" Jr. I-Beams Alternating on 8" Centers		S
WINCH		
- None		S
- 12,000 lb Braden - Front Mount		O
- 20,000 lb Braden - Front Mount		O
- Cable Roller Guide for Winch		O
DECK AND FEATURES		
- 102" Wide		S
- 1 ³ / ₈ " Apitong		S
- Deck Rating 40,000 lb in 10'		S
- 9° Load Angle		S
- Landoll Hoses and Components Certified to -40°F		S
ACCESSORIES		
- Approach Plate with (6) Keyhole Tie Downs		S
- Dual Hydraulic Controls Street and Curb Side		O
- Wireless Remote Control		O
TIE DOWNS / CHAIN GOTCHAS		
- Double Keyhole Chain Slots and Stake Pockets on 24" Centers		S

MODEL 345	25 TON	50,000 lb
TOOL BOX		
- Curb and Street Side Mounted with Lockable Doors 14" H x 26" W x 21" D		S
PARKING STANDS		
- Pin Drop		S
SUSPENSION / AXLES		
- SAF-Holland / Neway Air Ride RLU228, 22,500 lb Capacity		S
- Centralized Grease System		S
- (2) 25,000 lb Dual Tires, Oil Bath Bearings		S
BRAKES		
- 12.25x7.5 Full Air / Spring Brakes ABS, 4S2M		S
TIRES / RIMS		
- 235/75R 17.5 Double Coin Radial Tires		S
- 17.5x6.75 Tubeless Rims		S
- Steel Hub Pilot		S
HYDRAULIC SYSTEM		
- Hydraulic Quick Couplers 2500 PSI - 20 GPM at Controls, 50 GPM Max		S
LIGHTS		
- Grote Rubber Grommet Mounted Annealed LED Lighting		S
- Grote "Xtreme" Wiring Harness (7-Year Warranty)		S
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal		S
- Zinc Rich Primer		S
- TGIC Polyester Powder Coat		S
- White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray		
WEIGHT		
- 13,500 lb +/-3%		S



Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



1900 North Street

345 Pintle Hitch - 1025

CALL 1-800-428-5655
REMEMBER: QUALITY IS ALWAYS A BARGAIN!

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE