



440 / 455

TRAVELING AXLE TRAILER


Model 440
40 Ton Capacity
Model 455
55 Ton Capacity



- Easy Hook Up Hydraulics
- Upper Deck Lighted Toolboxes



- Smooth Transition to Upper Deck

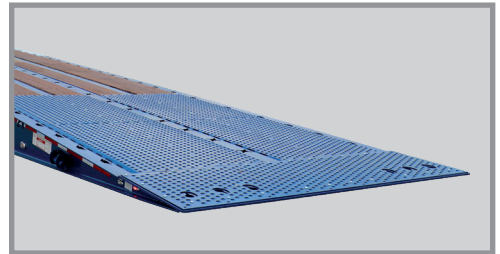

- 6.5° Low Load Angle
- Traction Plate Over Wood Decking
- Approach Plate Option



- Easy to Operate, Well-Lit Control Panel
- Wireless Remote Control Option



- Centralized Grease System Located at Bumper



- 8 Tail Light System with Standard Center Strobe Light
- Strobe Lights in Bumper Option
- Hot-Dipped Galvanizing Option

PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!

1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES

Model 440 / 455 Traveling Axle Trailer

S=Standard O=Optional

MODEL 455	55 TON	110,000 lb
MODEL 440	40 TON	80,000 lb
MAIN FRAME		
- Fabricated 80,000 and 100,000 PSI Yield Beams	S	S
- Four Beam Design	S	S
KINGPIN SETTING		
- 21" Setting	S	S
- 83½" Swing Clearance	S	S
- 2" 5th-Wheel Kingpin Hitch	S	S
CROSSMEMBERS		
- Alternating 4" and 3" Jr. I-Beam on 8" Centers	S	
- 4" Jr. I-Beam on 8" Centers		S
WINCH		
- 12,000 lb Worm Gear with Spring Tension and 85' of ½" Cable	S	S
- 20,000 lb Worm Gear with Spring Tension and 85' of ⅝" Cable	O	O
- 20,000 lb Planetary 2-Speed and 85' of ⅝" Cable	O	O
- 30,000 lb Planetary 2-Speed and 85' of ⅝" Flex 9 Cable	O	O
DECK AND FEATURES		
- 102" Wide	S	S
- Deck Rating 50,000 lb in 10'	S	
- Deck Rating 70,000 lb in 10'		S
- 90° Slope Drop	O	O
- 37" Deck Height (Loaded with 17.5 Tires and 48" King Pin Height) – Add 5" for 22.5 Tires	S	S
- 1⅝" Apitong Hardwood Deck	S	S
- Aluminum Pullouts to 13' Wide	O	O
- 6.5° Load Angle	S	S
- Landoll Hoses and Components Certified to -40°F	S	S
ACCESSORIES		
- Flat Approach Plate with 6 Keyhole Tie Downs	S	S
- Automatic Slack Adjusters	S	S
- Main Deck Center Slope Roller	S	S
- Upper Deck Slope Rollers	O	O
TIE DOWNS / CHAIN GOTCHAS		
- Double Keyhole Chain Slots with Square Stake Pockets on 16" Centers	S	S
TOOL BOX (UPPER DECK, BOTH SIDES)		
- Non-Load Bearing Top Opening Doors, Lighted	S	S
- Load-Bearing Top Opening Doors, Lighted	O	O
- Side Opening Doors, Lighted	O	O
PARKING STANDS		
- Jost Two Speed Landing Gear	S	S
- Pin Drop	O	O

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

MODEL 455	55 TON	110,000 lb
MODEL 440	40 TON	80,000 lb
SUSPENSION / AXLES		
- SAF-Holland / Neway Air Ride RLU228, 22,500 lb Capacity	S	S
- Dock Level Hydraulic 62,000 lb Capacity or 124,000 lb Capacity (Not Available with 215/75R 17.5 Low-Pro Tires)	O	O
- Centralized Grease System	S	S
- (2) 25,000 lb Axles, Dual Tire, Oil Bath Bearings	S	
- (3) 25,000 lb Axles, Dual Tire, Oil Bath Bearings		S
BRAKES		
- 12.25 x 7.5 Full Air / Spring Brakes ABS, 4S2M	S	S
- 16.5 x 7 Full Air / Spring Brakes ABS, 4S2M	O	O
- Air Disc Brakes	O	O
TIRES / RIMS		
- 235/75R 17.5 Double Coin Tires on 17.5 x 6.75 Tubeless Rims	S	S
- 255/70R 22.5 Double Coin Tires on 22.5 x 7.5 Tubeless Rims	O	O
- Michelin Tires or Continental Tires	O	O
- All Axles Prepped for Tire Inflation	S	S
- Tire Inflation System	O	O
- Hubodometer	O	O
HYDRAULIC HOOK UP		
- Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max	S	S
LIGHTS		
- Grote Rubber Grommet Mounted Annealed LED Lighting	S	S
- Grote "Xtreme" Wiring Harness (7-Year Warranty)	S	S
- Tow Mate Dual Function Work / Strobe Marker Lights	O	O
- Dual 2,200 Lumen Work Lamps (Available in Multiple Mounting Locations)	O	O
- Underdeck Work Zone Lighting	O	O
- Center Rear Strobe Light	S	S
- Mud Flap, Stop, Turn and Tail Lights	S	S
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal	S	S
- Zinc Rich Primer	S	S
- TGIC Polyester Powder Coat	S	S
White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray		
- Galvanizing	O	O
WEIGHT (ESTIMATED)		
- 440-41' — 16,820 lb +/-3%	S	
- 440-45' — 17,700 lb +/-3%	S	
- 440-48' — 18,575 lb +/-3%	S	
- 440-50' CA — 19,355 lb +/-3%	S	
- 440-53' — 19,610 lb +/-3%	S	
- 455-48' — 21,980 lb +/-3%		S
- 455-50' — 23,010 lb +/-3%		S
- 455-50' CA — 22,945 lb +/-3%		S
- 455-53' — 24,485 lb +/-3%		S
- 455-57' — 25,750 lb +/-3%		S

More Options Available. Please Consult Factory.



1900 North Street

CALL 1-800-428-5655

REMEMBER: QUALITY IS ALWAYS A BARGAIN!

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE