



835 / 840

AG DETACHABLE GOOSENECK



Model 835
35 Ton Capacity
Model 840
40 Ton Capacity





- Easily Adjustable Ground Clearance in 2" Increments
- Transport at Any Height While the Neck Remains Locked



- 68" or 42" Aluminum Ladder Ramps for Safe Easy Transition to Rear Deck



- Steel Frame Wood Decks Option
- Hydraulic Flip Third Axle Option

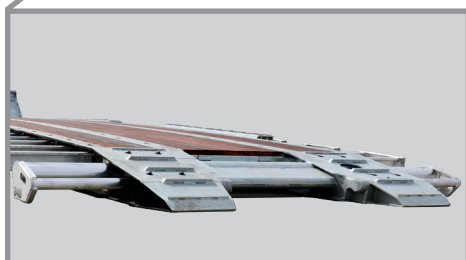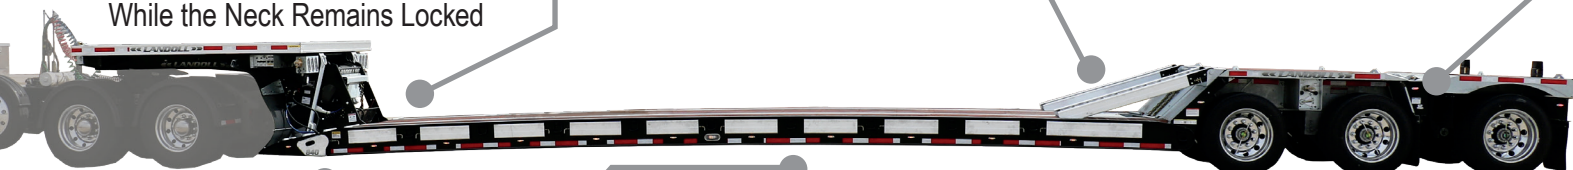

- Low Profile Front Approach
- Traction Bars on Approach
- 8 Keyhole Tie Downs on Approach
- Four Wheel or Tricycle Units Can Be Easily Loaded



- Rust-Free Aluminum Pullouts to 13' Width (7,000 lb Capacity Each on 835) (10,000 lb Capacity Each on 840)
- Pullouts are Strong as Steel Yet Save 1,000 lb of Weight
- Pullouts Adjustable on 6" Increments
- Aluminum Front Pullout Easily Adjusted by the Drivers



- 3 Stop Tail Turn and Strobe Lights
- Frame Prepped for Flip Third Axle
- Hot-Dipped Galvanizing Option

PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!

1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES


Model 835 / 840 Ag Detachable Gooseneck Trailer

S=Standard O=Optional

MODEL 835	35 TON	70,000 lb
MODEL 840	40 TON	80,000 lb
MAIN FRAME		
- Fabricated 100,000 PSI Four Beam Frame	S	S
- Capacity - 70,000 lb Distributed / 60,000 lb Concentrated in 12'		S
- Capacity - 80,000 lb Distributed in 16' / 60,000 lb Concentrated in 12'	S	
KINGPIN SETTING		
- 15" Pin Setting - 84" Swing Clearance 12' G/N	S	S
- 15" Pin Setting - 72" Swing Clearance 10' 9"	O	O
CROSSMEMBERS		
- 5" x 3" High Tensile Strength Tubing on 18" Centers		S
- 6" x 3" High Tensile Strength Tubing on 18" Centers	S	
GOOSENECK, DECK AND ACCESSORIES		
- 12' Gooseneck	S	S
- 10' 9" Gooseneck	O	O
- 102" Wide Removable Deck, Aluminum or Wood, Gooseneck and Trunnion (Rear Deck 2-Axle Trailers)	O	O
- 102" Width	S	S
- 120" Width (Select 835 Models)		O
- 18¼" Deck Height		S
- 19¼" Deck Height	S	
- 1½" Nominal, Apitong Full Width	S	S
- 27" Aluminum Telescoping Slide Out (Lower Deck)	S	S
- Flag and Banner Package (6 Flags and 2 Over Width Banners)	O	O
- Landoll Hoses and Components Certified to -40°F	S	S
TIE DOWNS / CHAIN GOTCHAS		
- Double Keyhole Chain Gotchas in Outer Flanges on 18" Centers		S
- Double Keyhole Chain Gotchas All (4) Frame Rails on 18" Centers	S	
- Double Keyhole Chain Gotchas Plate Located on 36" Centers		O
- (2) D-Rings Rear of Gooseneck	S	S
- Side Mounted D-Rings on 36" Centers		S
- (2) D-Rings at Base of Trunnion, Flush Mounted on Top of Inner Beams	S	S
- (2) D-Rings Inner Web-Mounted Top of Trunnion	S	S
- (2) D-Rings Rear of Trunnion, Flush Mounted on Top of Inner Beams	S	S
- (2) D-Rings at Top of Trunnion Slope (Outer Web)	S	S
TOOL BOX		
- 24" H x 14" W x 22½" D, Curb Side of Gooseneck, Galvanized	O	O
WINCHES AND ACCESSORIES		
- Worm Gear 12,000 lb with 85' of ½" Cable		O
- Worm Gear 20,000 lb with 85' of ¾" Cable		O
- Planetary 20,000 lb with 85' of ¾" Cable	O	O
- Planetary 30,000 lb with 85' of ¾" Cable	O	O

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

MODEL 835	35 TON	70,000 lb
MODEL 840	40 TON	80,000 lb
PULLOUTS		
- Rust-Free Aluminum Pullouts to 13' Width		S
- 7,000 lb Capacity Each		S
- 10,000 lb Capacity Each	S	
- (2) Planks for Bridging Aluminum Pullouts	O	O
SUSPENSION / AXLES		
- SAF-Holland / Neway Air Ride	S	S
- Centralized Grease System - All Axles	S	S
- (2) 25,000 lb Dual Tire, Oil Bath Bearings	S	S
- Air Raise / Lower Control and Suspension Dump Valve	S	S
- Digital Air Weigh Scale System	O	O
BRAKES / HUBS		
- Automatic Slack Adjusters / Outboard Brake Drum		S
- 16.5 x 7 Full Air / Spring Brakes, ABS, 4S2M	S	S
- 22.5 x 8.25 Hub Pilot / Steel Outboard Hubs	S	S
- Air Disc Brakes with Dexter Suspension	O	O
TIRES / RIMS		
- 255/70R 22.5 LRH Double Coin	S	S
- Spare Tire and Hub Pilot Type Rim (255/70R 22.5)	O	O
- PSI Tire Inflation System	O	O
- Aluminum Wheels	O	O
- Hubodometer	O	O
HYDRAULIC POWER SOURCE		
- Hydraulic Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max		S
- 11 HP Honda Engine Package Gooseneck Mounted with Cover	O	O
- 25 HP Kohler Engine Package Gooseneck Mounted with Cover	O	O
LIGHTS		
- Grote Rubber Grommet Mounted Annealed LED Lighting	S	S
- Grote "Xtreme" Wiring Harness (7-Year Warranty)	S	S
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal	S	S
- TGIC Polyester Powder Coat	S	S
White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray		
- Galvanized Finish for Gooseneck, Frame and Flip	O	O
ESTIMATED WEIGHT (BASE)		
- 835AG-53 / 840AG-53 Consult Factory		

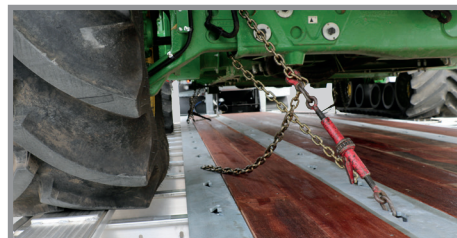

• Double Keyhole Chain Gotchas



1900 North Street

835/840 - 1025

CALL 1-800-428-5655
REMEMBER: QUALITY IS ALWAYS A BARGAIN!

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE