




845

AG DETACHABLE GOOSENECK

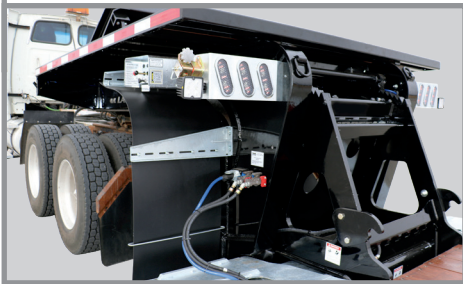

- Easily Adjustable Ground Clearance in 2" Increments
- Transport at Any Height with Neck Teeth Seated
- Hot-Dipped Galvanizing Option



- Low Profile Front Approach
- Four Wheel or Tricycle Units Can Be Easily Loaded, No Heavy Ramps
- Safe Loading Directly on Lower Deck
- Increased Driver Confidence While Loading



- Rust-Free Aluminum Pullouts to 13' Width (14,000 lb Capacity Each)
- Pullouts are Strong as Steel Yet Save 1,000 lb of Weight
- Pullouts Adjustable on 6" Increments
- Aluminum Front Pullout Easily Adjusted by the Drivers

PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!

1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES

Model 845 Ag Detachable Gooseneck Trailer

S=Standard O=Optional

MODEL 845	45 TON	90,000 lb
MAIN FRAME		
- Fabricated 100,000 PSI Four Beam Frame		
- Capacity - 90,000 lb Distributed / 90,000 lb Concentrated in 16'		
KINGPIN SETTING		
- 15" Pin Setting - 84" Swing Clearance 12' G/N		
CROSSMEMBERS		
- 8" x 3" High Tensile Strength Tubing on 18" Centers		
GOOSENECK, DECK AND ACCESSORIES		
- 12' Gooseneck with Front Flip Provisions		
- 102" Wide Removable Deck, Aluminum or Wood, Gooseneck and Trunnion (Rear Deck for 2-Axle Trailers)		
- 102" Width		
- 120" Width (Select 845 Models)		
- 19 1/4" Deck Height		
- 1 1/2" Nominal, Apitong Full Width		
- 27" Aluminum Telescoping Side Extensions (Lower Deck)		
- Flag and Banner Package (6 Flags & 2 Overwidth Banners)		
- Landoll Hoses and Components Certified to -40°F		
TIE DOWNS / CHAIN GOTCHAS		
- Double Key Hole Chain Slots Located on 36" Centers		
- (2) D-Rings Rear of Gooseneck		
- (2) D-Rings at Base of Rear Trunnion Flush Mounted on Top of Inner Beams		
- Side Mounted D-Rings on 36" Centers		
- (2) D-Rings Inner Web-Mounted Top of Trunnion		
- (2) D-Rings Rear of Trunnion, Flush Mounted on Top of Inner Beams		
- (2) D-Rings at Top of Trunnion Slope (Outer Web)		
- (2) D-Rings at Base of Trunnion		
TOOL BOX		
- 24" H x 14" W x 22 1/2" D, Curb Side of Gooseneck		
WINCHES AND ACCESSORIES		
- Planetary 20,000 lb with 85' of 5/8" Cable		
- Planetary 30,000 lb with 85' of 5/8" Cable		
PULLOUTS		
- Rust-Free Aluminum Pullouts to 13' Width		
- 14,000 lb Capacity Each		

MODEL 845	45 TON	90,000 lb
LIFT CYLINDERS		
- Horizontally Mounted		
AXLES		
- (2) 25,000 lb Dual Tire, Oil Bath Bearings		
SUSPENSION		
- SAF-Holland / Neway Air Ride		
- Centralized Grease System		
- Air Raise and Lower		
- Digital Air Weigh Scale System		
BRAKES / HUBS		
- Automatic Slack Adjusters / Drum Brakes		
- 16.5 x 7 Full Air / Spring Brakes, ABS, 4S2M		
- 22.5 x 8.25 Hub Pilot / Steel Outboard Hubs		
- Air Disc Brakes		
TIRES		
- 255/70R 22.5 LRH Double Coin		
- Spare Tire and Hub Pilot Type Rim (255/70R 22.5)		
- PSI Tire Inflation System		
WHEEL ACCESSORIES		
- Aluminum Wheels		
- Hubodometer		
HYDRAULIC POWER SOURCE		
- Air Shift PTO and Wet Kit for Tractor - Not Installed		
- Hydraulic Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max		
- 11 HP Honda Engine Package with Front Cover Front Extension Mount		
- 25 HP Kohler Engine Package		
LIGHTS		
- Grote Clear Lens LED (10-Year Warranty)		
- Grote "Xtreme" Wiring Harness (7-Year Warranty)		
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal		
- TGIC Polyester Powder Coat		
- White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray		
- Galvanizing		
ESTIMATED WEIGHT (BASE)		
- 53' - 845 - 23,000 lb +/- 3%		



- 2 1/2" Clearance, Cylinders Fully Extended (Temporary Clearance at Slow Speed)



- 1 1/4" Clearance with Teeth Seated in Highest Setting



- 1 1/2" Clearance with Teeth Seated in Fifth Tooth

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



1900 North Street

CALL 1-800-428-5655
REMEMBER: QUALITY IS ALWAYS A BARGAIN!

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE