



860


DETACHABLE GOOSENECK



- Easily Adjust Ground Clearance from 6½" to 18"
- Transport at 7 Height Positions While the Neck Remains Locked
- Storage Area Option Between Arms
- Chain / Binder Rack Option



- Full Length Recessed Boom Trough
- Dropped Wheel Bolster
- No Front Crossmember in Slope

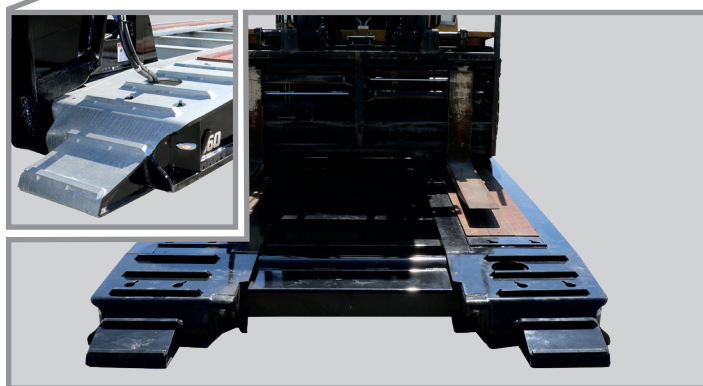

- Low Profile Approach
- Traction Bars on Approach
- 8 Keyhole Tie Downs on Approach



- Flip Brackets, Air / Electric Couplers
- "V" Type Rear Bumper
- High Visibility Lights
- Electrical Outlet for Accessory Lights
- Standard Rear Strobe Lighting
- Wheel Covers and Flip Axle Option

PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!

1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES

Model 860 Detachable Gooseneck Trailer

S=Standard O=Optional

MODEL 860	60 TON	120,000 lb
MAIN FRAME		
- Fabricated 80,000 PSI Yield 4 Beam Design with 100,000 PSI Flanges	S	
- Capacity - 120,000 lb Distributed / 120,000 lb Concentrated in 14'	S	
KINGPIN SETTING		
- Dual Pins 15" and 33" – 108" and 90" Swing Clearance	S	
CROSSMEMBERS		
- 8" High Tensile I-Beams on 24" Centers	S	
- Extra Crossmembers	O	
GOOSENECK, DECK AND ACCESSORIES		
- Gooseneck Front Flip Extension Ready	S	
- 12' 3" Dual Drop-In Kingpin Settings	S	
- Flip Axle Ready or 14' 1" Stinger Ready (3+1 Configuration)	S	
- 11" Swing-Out Outriggers	S	
- HD Sloped Front Approach with Traction Bars	S	
- 6' Recessed Bucket Trough at Rear of Lower Deck	S	
- Open Boom Trough with "V" Type Bumper	S	
- Three Pair Flag Holders	S	
- 102" Wide	S	
- 2" Nominal Apitong Track Area	S	
- Landoll Hoses and Components Certified to -40°F	S	
LIFT CYLINDERS		
- Horizontally Mounted	S	
LOADED GROUND CLEARANCE		
- 6½"	S	
LOADED DECK HEIGHT		
- 19½"	S	
BOLSTERS		
- Half Front Bolster with Traction Bars, Lowered Bolster Between Tires (20,000 lb Capacity); Rear Bolster (17,500 lb Capacity)	S	
TIE DOWNS / CHAIN GOTCHAS		
- Angled D-Rings on Lower Deck, Trunnion: 1 on End of Each Bolster, 2 at Rear of Lower Deck, 2 at Top of Rear Slope, 2 at Rear of Trunnion	S	

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

MODEL 860	60 TON	120,000 lb
STORAGE AREA		
- (1) Between Main Frame at Front of Lower Deck (Approx. 48" W x 24" L x 10" D)	S	
TRUNNION		
- Boom Trough Cover	O	
- Nitrogen Stinger-Single 25,000 lb Air Ride Axle (14' 1" Spread)	O	
25,000 lb Includes 275 Tires-Self-Contained Honda Engine Package	O	
- Nitrogen Spreader Bar – Includes Self-Contained Honda Engine Package and Brackets for Flip Axle	O	
(Flip Axle Assembly for 54" Spread Will Create a Total Spread of 14' 1")		
SUSPENSION / AXLES		
- SAF-Holland / Neway Air Ride, 25,000 lb Capacity with Mechanical Ride Height Control Valve	S	
- Centralized Grease	S	
- (3) 25,000 lb Dual Tire, Oil Bath Bearings	S	
- 50" Axle Spacing (Changes Deck / Trailer Length)	S	
- 54" Spacing	S	
- 60" Axle Spacing (Changes Deck / Trailer Length)	S	
- Automatic Slack Adjusters – All Axles / Drum Brakes	S	
- Centralized Grease System – All Axles	S	
BRAKES / HUBS		
- 16.5x7 Full Air with Spring Brakes on 3 Axles ABS, 4S2M	S	
- Air Disc Brakes with Dexter Suspension	O	
TIRES / RIMS		
- 275/70R 22.5 LRH Double Coin	S	
- 22.5 x 8.25 Steel Hub Piloted	S	
- 22.5 Aluminum	S	
- Tire Inflation System	O	
HYDRAULIC SYSTEM		
- Hydraulic Quick Couplers 2,500 PSI – 20 GPM at Controls, 50 GPM Max	S	
LIGHTS		
- Grote Rubber Grommet Mounted Annealed LED Lighting	S	
- Grote "Xtreme" Wiring Harness (7-Year Warranty)	S	
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal	S	
- Zinc Rich Powder Primer	S	
- TGIC Polyester Powder Coat	S	
White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray		
- Galvanizing	O	
WEIGHT (BASE)		
- 53' - 860 - 25,400 lb +/- 3%	S	
ESTIMATED WEIGHTS		



Stinger Option



1900 North Street

860 - 1025

CALL 1-800-428-5655
REMEMBER: QUALITY IS ALWAYS A BARGAIN!

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE