




MULTI-PRODUCT CONTAINER / EQUIPMENT TRAILERS & CARRIERS

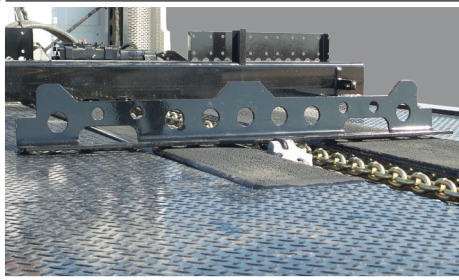

Push Bar

- 80,000 PSI Steel Plate
- Light Weight and Strong
- Engineered to Push the Heaviest Load

Protect Your Investment

- Centralized Grease System
- Less Down Time
- Conveniently Located
- Up to 16 Lubrication Points

Built For Power

- 12,000 lb Capacity Gear Box
- 1/2" G70 Chain
- Combination of Power and Strength



PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!

1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES

Multi Product Container / Equipment Trailers & Carriers

S=Standard O=Optional

MODEL NUMBER	343	344	LOADOLL II
Specifications (*Manufacturer's Estimates)			
*Base Weight	14,900 lb (43')	17,000 lb (43')	6,500 lb (23')
Capacity	10,000 lb	15,000 lb	20,000 lb
Deck Rating	10,000 lb in 10'	15,000 lb in 20'	17,000 lb in 16'
Tires, Rims	255/70R 22.5 LRH Double Coin	255/70R 22.5 LRH Double Coin	Depends on Truck
Wheels	Hub Pilot 22.5x8.25	Hub Pilot 22.5x8.25	Depends on Truck
Axles	(1) - 25,000 lb Dual Tire Oil Bath Bearings	(2) - 25,000 lb Dual Tire Oil Bath Bearings	Depends on Truck
Suspension	Air Ride 22,500 lb Capacity	Air Ride 22,500 lb Capacity	Depends on Truck
Brakes	16½ x 7 Full Air / Spring Brakes, ABS 2S1M	16½x7 Full Air / Spring Brakes, ABS 4S2M	Depends on Truck
Dimensional Standards			
Lengths	39'		
	43'	43'	23'
	46'	46'	25'
	50'	50'	
Width	102"	102"	102"
Deck Height (At Axle Location)	48" (45" Fifth Wheel)	48" (45" Fifth Wheel)	10⅞" Above Truck Frame
Pin Setting / Swing Clearance	18" / 74"	18" / 78"	N/A
Load Angle	12°	12°	Depends on Truck
Equipment Standards			
Lockable Storage Box	(1) 42" W x 28" D x 9" H Under Deck Mounted	(1) 42" W x 28" D x 9" T Under Deck Mounted	O
Winch / Gear Box Chain Drive Load System	Chain Drive Line Pull 12,000 lb or 12,000 lb Planetary Gear Winch		
Chain Handling Package	Front Chain Bridle		
Tie - Downs	Tie Down Package in Deck	Tie Down Package in Skid Plate	(2) - 4" Nylon Strap Hand Ratchets
Container Skid Plate / Side Rail	Formed Outer Beam and Skid Plate		
Side Container Guides	O	O	N/A
Central Grease System	S	S	N/A
Park Stands	Jost Two Speed	Jost Two Speed	N/A
Lights / Wiring Harness	Grote Rubber Mounted LED Lighting (Annealed Markers), Grote "Xtreme" Wiring Harness (7-Year Warranty)		
Finish	TGIC Polyester Powder Coat - White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray		
Features / Equipment			
Winch	12,000 lb or 20,000 lb	12,000 lb or 20,000 lb	20,000 lb
Wireless Remote Control	S	S	S
Centering Boards	S	S	S
Tires, 235/75R 17.5 Double Coin LRH	O	O	N/A
Tires, 255/70R 22.5 Michelin in Lieu of Standard	O	O	N/A
Air Ride Suspension in Lieu of Standard	S	S	N/A
PSI Tire Inflation System	O	O	N/A
Parking Stands	Pin Drop	Pin Drop	N/A
Air Shift PTO and Wet Kit for Tractor	O	O	S
Hydraulic Engine Package - 25HP Kohler	O	O	N/A
Hot Dip Galvanizing	O	O	N/A
Paint Over Galvanizing	O	O	N/A
Special Paint	As Requested	As Requested	As Requested

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



CALL 1-800-428-5655

REMEMBER: QUALITY IS ALWAYS A BARGAIN!

1900 North Street | Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779

MultiContainer - 0525



MORE INFO HERE