



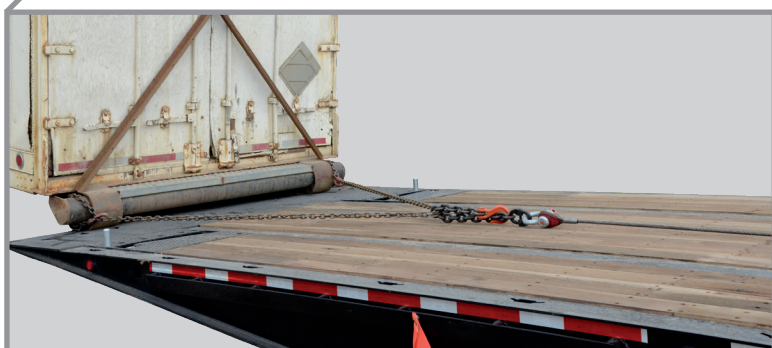

400 SERIES

KICKER ROLLER OPTION

**Easy Loading
& Transporting**


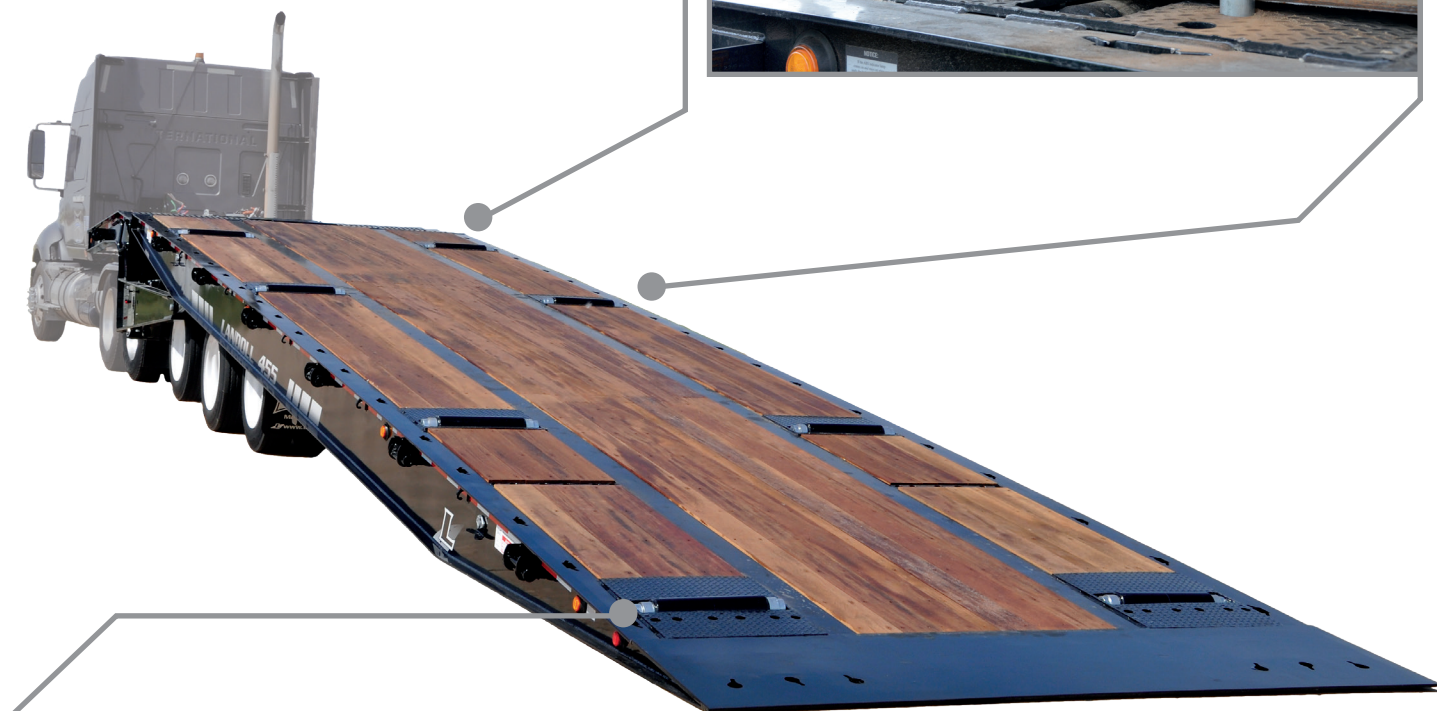


PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!
1-800-428-5655 | www.landoll.com/trailers



STANDARD & OPTIONAL EQUIPMENT / FEATURES

400 Series Kicker Roller Option

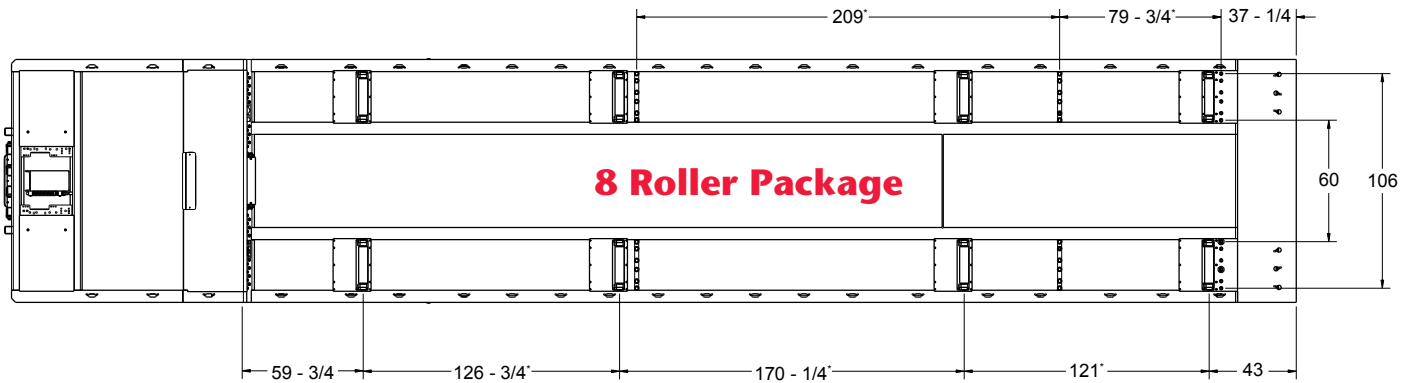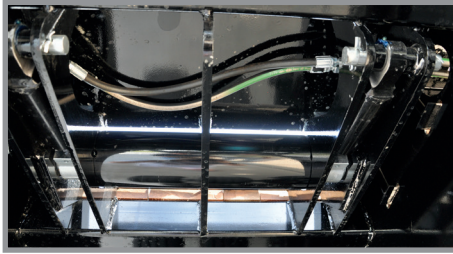

* Dimensions Vary with Frame Length. Guide Pin Dimensions 120" Shown

ROLLER WIDTH DIMENSIONS

Trailer Width	102"	108"	120"
OD Roller**	83"	89"	101"
ID Roller**	53"	53"	65"
Roller Width**	15"	18"	18"

** Dimensions Vary Depending On 12 1/4 on 16.5 Brake

8 ROLLER PACKAGE

6 Skid Alignment Receivers and Pins
6 Pin Locations
Front 4 / Rear 4 Roller Row Independently Operated
10,000 lb Per Roller Capacity

- Handle Skid-Mounted Equipment for Oil Fields and Other Industries
- Hydraulic Rollers Stored Below Deck Surface
- Independent Hydraulic Controls Raise Rollers 2 1/2" Above Deck
- Kicker Roller Allows Operator to Winch a Skid onto the Deck at 6° Load Angle
- Gentle Loading Can Be Used on Most Valuable Commodities

- Ideal for Skids, Tanks, Bunks for Oil Fields, Skid-Mounted Containers, and Portable Buildings
- Dual Hydraulic Lift Cylinder System Adds Strength and Stability While Lifting or Operating on Rollers
- End-Mounted Lift Cylinders Directly in Alignment with Roller Guidance Tracks
- Guidance Tracks Keep Rollers from Binding Even Under Heavy Loads

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



1900 North Street

400 Kicker Roller Option - 1025

CALL 1-800-428-5655
REMEMBER: QUALITY IS ALWAYS A BARGAIN!

Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779



MORE INFO HERE